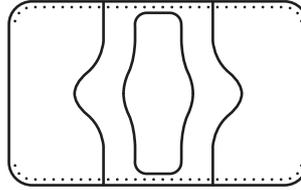# DOUBLE FOLDED CARD HOLDER
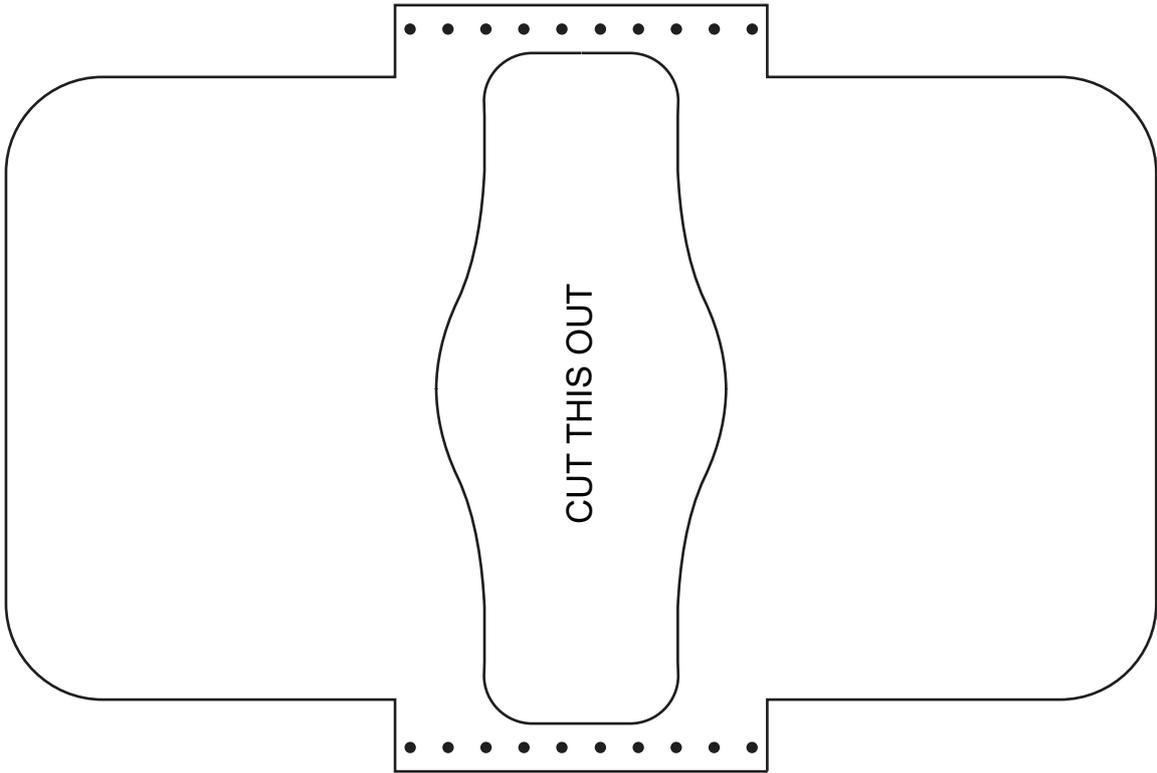

PRINT TEST:

Please make sure you have printed this document to 100% scale.
Measure the square(s) below to verify printing was correct.

1 INCH
1 INCH

25MM
25MM

INSTRUCTIONS:

1. Print out on 110LB or heavier card stock paper.

2. You will have to connect PANEL A and PANEL B together to create one template.
   Cut along the dashed line and tape together at the "scissors" icon.

2. Trace the pattern pieces on to your leather (grain side).
   Mark stitching holes (if applicable).

3. Cut out the leather pieces starting with outside perimeter. After cutting out,
   move to the inside of the INTERIOR PANEL and cut that section out.

4. Burnish the curved lip section of both sides of the card holder. Also, burnish the
   inside of the INTERIOR PANEL that you cut out in the previous step.

5. Align the INTERIOR PANEL at the center. INTERIOR PANEL is grain side up.
   EXTERIOR PANEL is flesh side up. Test alignment.

6. Glue the INTERIOR PANEL in place at top and bottom tabs.

7. Fold each card slot over and glue in place.

8. Mark your stitching line on top and bottom.

9. Punch your holes and sew.

10. Sand, bevel, and burnish the edges to your preference.

CUT THIS OUT

INTERIOR PANEL

PANEL A

PANEL B