

A

VL-PS-COG-VLSZT029-01 REV.

(COG-VLSZT029-01)

APR/2018

PAGE 1 OF 24

DOCUMENT NUMBER AND REVISION

VL-PS-COG-VLSZT029-01 REV. A

(COG-VLSZT029-01)

DOCUMENT TITLE:

PRELIMINARY SPECIFICATION

OF

LCD MODULE TYPE

MODEL NO.: COG-VLSZT029-01

CUSTOMER	
MODEL NUMBER	COG-VLSZT029-01
CUSTOMER APPROVAL	
DATE	

DEPARTMENT	NAME	SIGNATURE	DATE
PREPARED BY			
CHECKED BY			
APPROVED BY			
QUALITY BY			

DISTRIBUTION LIST: MARKETING

APR/2018

DOCUMENT REVISION HISTORY

[illegible]

CONTENTS

DOCUMENT REVISION HISTORY	2
1. GENERAL DESCRIPTIONS	4
2. MECHANICAL SPECIFICATIONS	5
3. INTERFACE SIGNALS.....	7
4. ABSOLUTE MAXIMUM RATINGS.....	9
5. ELECTRICAL SPECIFICATIONS	10
5.1 BLOCK DIAGRAM	10
5.2 TYPICAL ELECTRICAL CHARACTERISTICS	11
5.3 TIMING CHARACTERISTICS	13
5.3.1 LVDS AC electrical characteristics.....	13
5.3.2 LVDS Input Format.....	15
5.3.3 Video Signal Timing	15
5.4 POWER ON/OFF SEQUENCE.....	17
6. OPTICAL CHARACTERISTICS.....	18
6.1 RELIABILITY TEST CONDITIONS	20
7. QUALITY REQUIREMENTS	21
8. DEFINITIONS.....	24
9. LIFE SUPPORT APPLICATIONS	24
10. APPENDIX	24

**Preliminary Specification
of
FOG Type
Model No.: COG-VLSZT029-01**

**Note: The characteristics and performance index listed in this preliminary specification are for early product requirements review and definitions only. They are subjected to changes
The specification is not for final design or performance indication.**

1. General Descriptions

- 10.25" (diagonal), 8:3, landscape, normally black, ADS, transmissive, amorphous silicon TFT LCD module
- Display Resolution: 1280 x RGB x 480
- Wide viewing angle (U/D/L/R): Free viewing direction
- Display up to 16.7M colours
- 24-bit one port LVDS interface (with T-CON)
- Anti-Glare front polarizer

2. Mechanical Specifications

The mechanical detail is shown in Fig. 1 and summarized in Table 1 below.


Table 1

Parameters		Specifications	Unit
Outline dimensions	Width x Height	255.6(W) x 105.82(H) x 1.41(T)	mm
Color TFT 1920 x RGB x 720	Active area	243.84(W) x 91.44(H)	mm
	Display format	1280 x RGB x 480	dots
	Color configuration	RGB Vertical stripes	-
	Dot pitch	(0.0635*3) (W) x 0.1905 (H)	mm
Backlight		LED	-
Weight		TBD	Kg

APR/2018

THE DRAWING ON THIS PRINT AND INFORMATION THEREWITH ARE PROPRIETARY TO VARITRONIX AND SHALL NOT BE USED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION OF VARITRONIX.

ISSUE	AMENDMENT	DATE



3. Interface Signals

Table 2a: Pin Assignments for the LCD Connector

Pin No.	Symbol	Description	Remarks
1	AGND	Ground	
2	NC	No connect	
3	DVDD	Power pin	3.3V typ.
4	GND	Ground	
5	NC	No connect	
6	DVDD	Power pin	
7	GND	Ground	
8	NC	No connect	
9	NC	No connect	
10	NC	No connect	
11	NC	No connect	
12	NC	No connect	
13	NC	No connect	
14	NC	No connect	
15	GND	Ground	
16	DVDD_LVDS	DVDD_LVDS	
17	GND	Ground	
18	PIND3	Positive LVDS differential data input	
19	NIND3	Negative LVDS differential data input	
20	GND	Ground	
21	PINC	Positive LVDS differential clock input	
22	NINC	Negative LVDS differential clock input	
23	GND	Odd Clock channel +	
24	PIND2	Positive LVDS differential data input	
25	NIND2	Negative LVDS differential data input	
26	GND	Odd Data channel 3 +	
27	PIND1	Positive LVDS differential data input	
28	NIND1	Negative LVDS differential data input	
29	GND	Even Data channel 0 +	
30	PIND0	Positive LVDS differential data input	
31	NIND0	Negative LVDS differential	

A

(COG-VLSZT029-01)

APR/2018

PAGE 8 OF 24

Pin No.	Symbol	Description	Remarks
		data input	
32	GND	Ground	
33	GND LVDS	GND LVDS	
34	GRB	Global reset pin	
35	STBYB	Standby mode	L: Standby H: Normal
36	NC	No connect	
37	DVDD	Power pin	
38	NC	No connect	
39	AGND	Ground	
40	NC	No connect	
41	NC	No connect	
42	NC	No connect	
43	GND	No connect	
44	DVDD	Power pin	
45	GND	Ground	
46	NC	No connect	
47	NC	No connect	
48	NC	No connect	
49	NC	No connect	
50	NC	No connect	
51	NC	No connect	
52	NC	No connect	
53	GND	Ground	
54	DVDD	Power pin	
55	SELB	6bit/8bit mode select	
56	VGH	Positive power for TFT	
57	DVDD	Power pin	
58	VGL	Negative power for TFT	
59	GND	Ground	
60	BIST	BIST	

4. Absolute Maximum Ratings

The product or its functions may subject to permanent damage if it's stressed beyond those absolute maximum ratings listed below. Exposure to absolute maximum rating conditions for extended periods may affect display module reliability.

Table 3: Absolute Maximum Ratings & Environmental Conditions

Item	Symbol	Min.	Max.	Unit
Digital supply voltage	VDD	-0.3	+3.96	V
Digital I/O input signals	V _{IO}	-0.3	VDD+0.3	V
Relative Humidity (at 60°C, Note 3)	RH		90	%
Operating Temperature (Note 2)	Topr	-20	+70	°C
Storage Temperature	Tstg	-30	+80	°C

Note 1: GND=VSS=0V.

Note 2: Panel surface temperature should not exceed 70°C.

Note 3: No condensation allowed under any condition.

Note 4: No performance guarantee below -20°C

[Caution]

Do not display fixed pattern for prolonged hours because it may develop image sticking on the display.

5. Electrical Specifications

5.1 Block Diagram

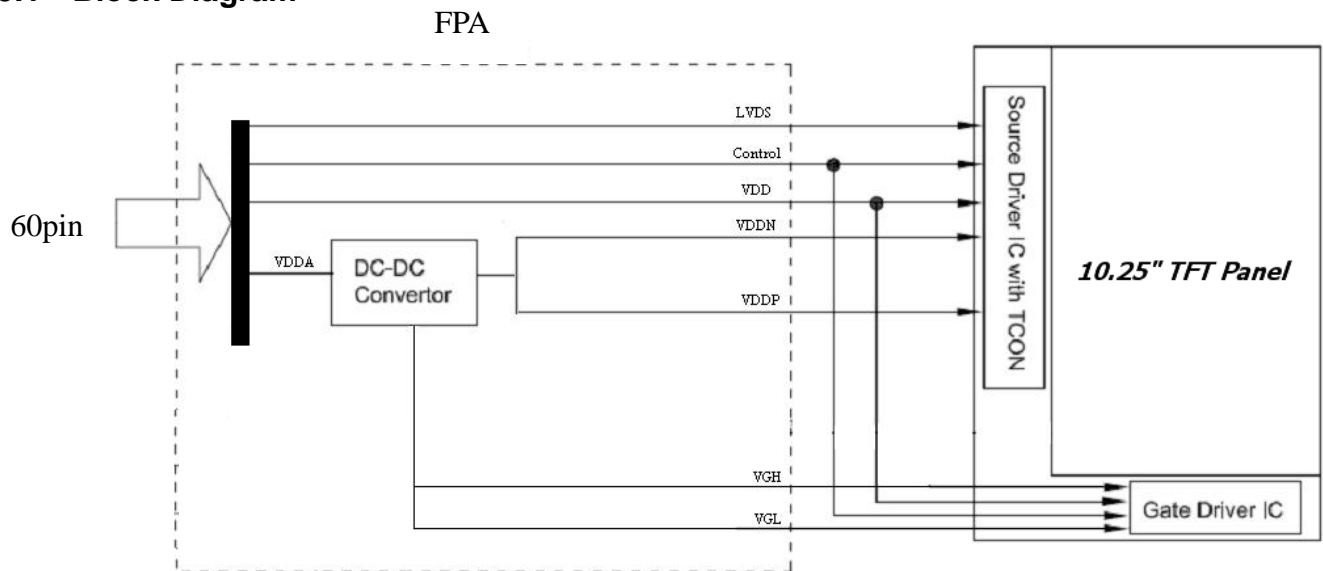


Figure 2: Block Diagram

5.2 Typical Electrical Characteristics

Table 4


Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage f	VDD	3.0	3.3	3.6	V
Power supply current for DCDC	IVDDA (Note 2)	-	-	500	mA
Power supply current for Logic	IDD (Note 2)	-	-	30	mA
Driver input high signal voltage	V _{IH}	0.7*VCC	-	VCC	V
Driver input low signal voltage	V _{IL}	GND		0.3*VCC	

Note 1: There is tolerance in optimum LCD driving voltage during production and it will be within the specified range.

Note 2: All white pattern.

Table 5 LVDS DC Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Differential input high Threshold voltage	R _{XVTH}	+0.1	-		V
Differential input low threshold voltage	R _{XVTL}		-	-0.1	V
Differential input common Mode voltage	R _{XVCM}	1	1.2	1.7- V _{ID} /2	V
LVDS input voltage	V _{INLV}	0.7		1.7	V
Differential input voltage	V _{ID}	0.2		0.6	V
Differential input leakage Current	R _{VXliz}	-10	-	+10	uA

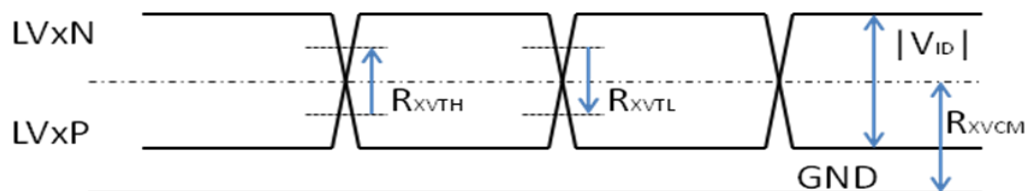

A

(COG-VLSZT029-01)

APR/2018


PAGE 12 OF 24

5.3 Timing Characteristics

5.3.1 LVDS AC electrical characteristics

Table 7: AC Characteristic of LVDS

Parameter	Symbol	Min.	Typ.	Max.	Unit
Clock frequency	$F_{LV CYC}$	20	-	85	MHz
Clock period	$T_{LV CYC}$	11.76			ns
1 data bit time	UI		1/7		$T_{LV CYC}$
Clock high time	$T_{LV CH}$		4		UI
Clock low time	$T_{LV CL}$		3		UI
Position 1	T_{POS1}	-0.2	0	0.2	UI
Position 0	T_{POS0}	0.8	1	1.2	UI
Position 6	T_{POS6}	1.8	2	2.2	UI
Position 5	T_{POS5}	2.8	3	3.2	UI
Position 4	T_{POS4}	3.8	4	4.2	UI
Position 3	T_{POS3}	4.8	5	5.2	UI
Position 2	T_{POS2}	5.8	6	6.2	UI
Input eye width	T_{EYEW}	0.6			UI
Input eye border	T_{EX}			0.2	UI
LVDS wake up time	T_{ENLVDS}			150	us

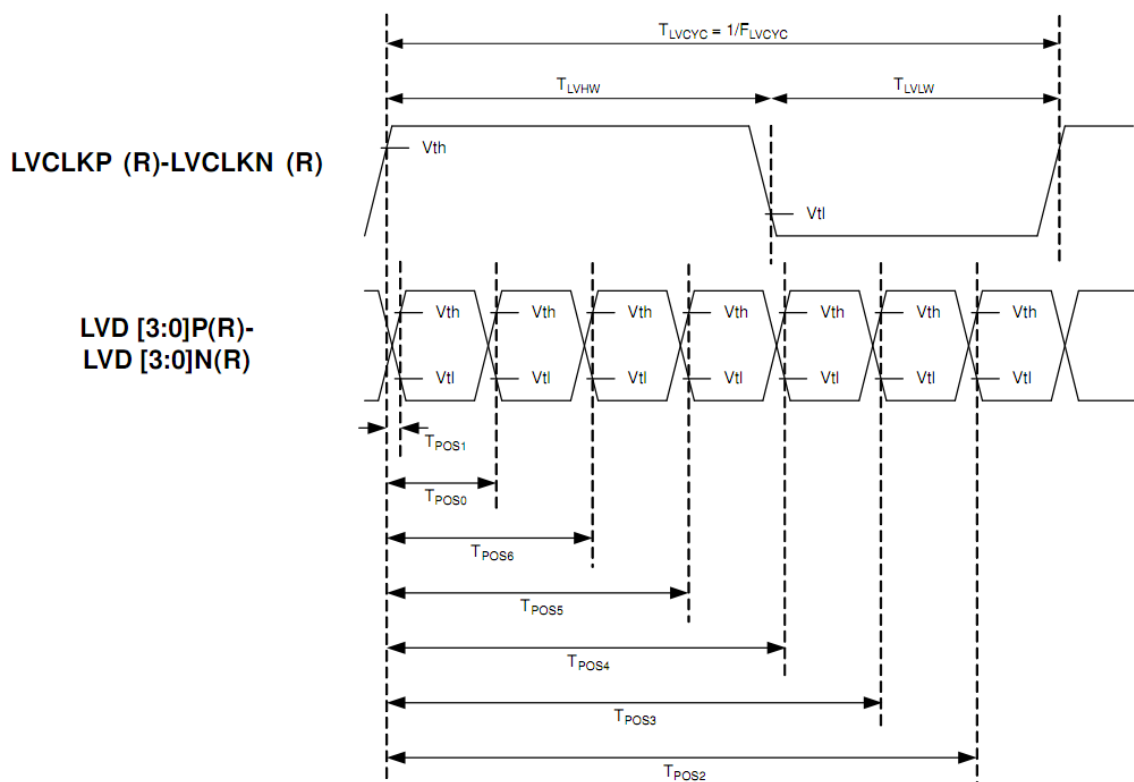


A

(COG-VLSZT029-01)



APR/2018

PAGE 14 OF 24

Single-ended:
LVD [3:0]P,
LVD [3:0]N

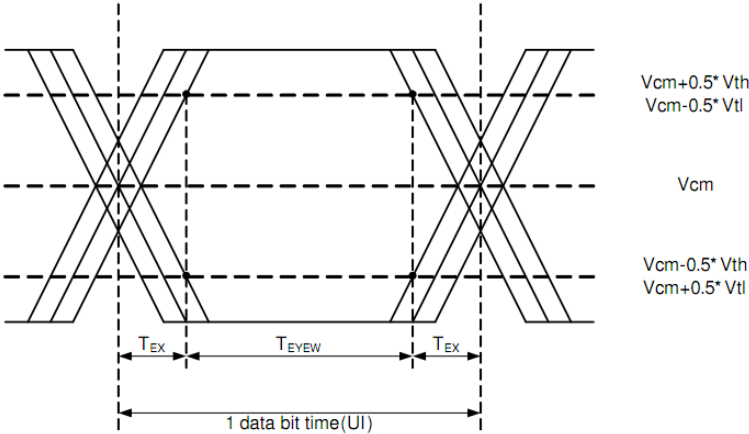

Differential:
LVD [3:0]P-LVD [3:0]N

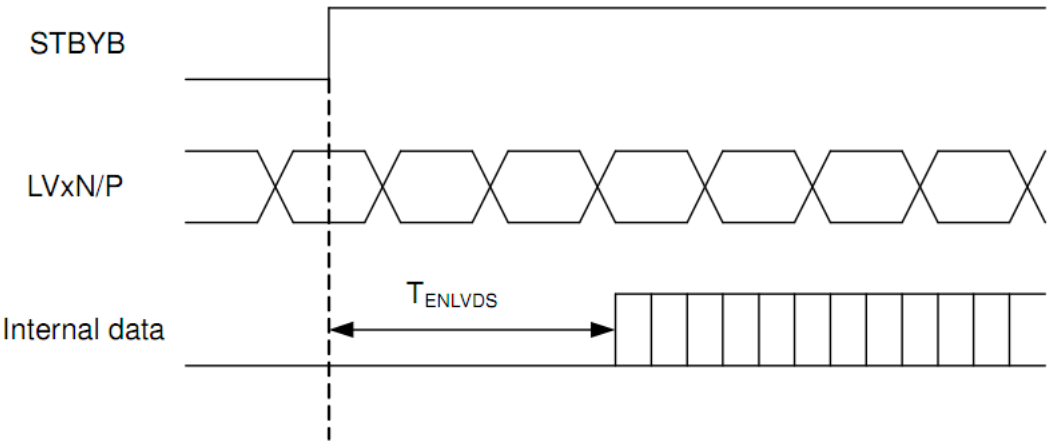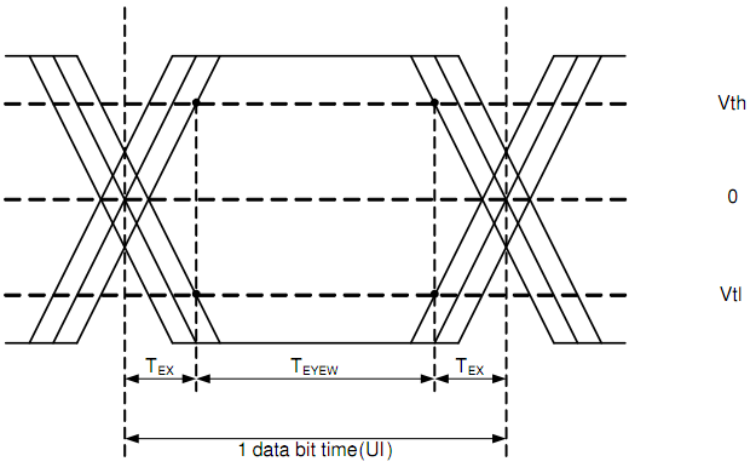

A

(COG-VLSZT029-01)

APR/2018

PAGE 15 OF 24

5.3.2 LVDS Input Format

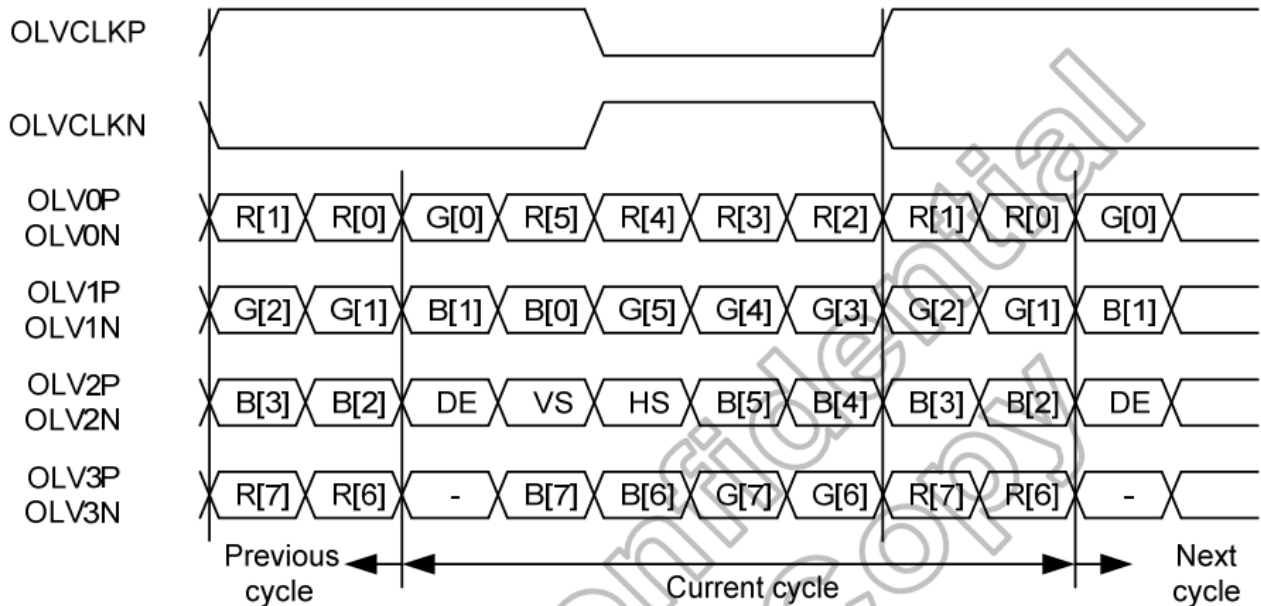


Figure 3: 1port LVDS signals, VESA format, 8-bit mode

5.3.3 Video Signal Timing

Table 8: Video signal timing


Symbol	Parameter	Conditions	Related Pins	Min.	Typ.	Max.	Unit
VP	Vertical Total	-	VSYNC	487	493	624	Line
VS	VSYNC Low Pulse Width	-	VSYNC	1	3	20	Line
VBP	Vertical Back Porch	-	VSYNC	2	5	255	Line
VFP	Vertical Front Porch	-	VSYNC	5	8	260	Line
VDISP	Vertical Active Area	-	VSYNC, HSYNC	-	480	-	Line
HP	Horizontal Total	-	HSYNC	1309	1322	1664	
HS	HSYNC Low Pulse Width	-	HSYNC	10	12	255	DCK
HBP	Horizontal Back Porch	-	HSYNC	5	16	255	DCK
HFP	Horizontal Front Porch	-	HSYNC	24	26	260	DCK
HDISP	Horizontal Active Area	-	HSYNC	-	1280	-	DCK
Fframe	Frame Frequency	-	CLK	-	60	-	Hz
fCLK	CLK frequency	-	CLK	38.3	39.1	-	MHz

A

(COG-VLSZT029-01)

APR/2018

PAGE 16 OF 24

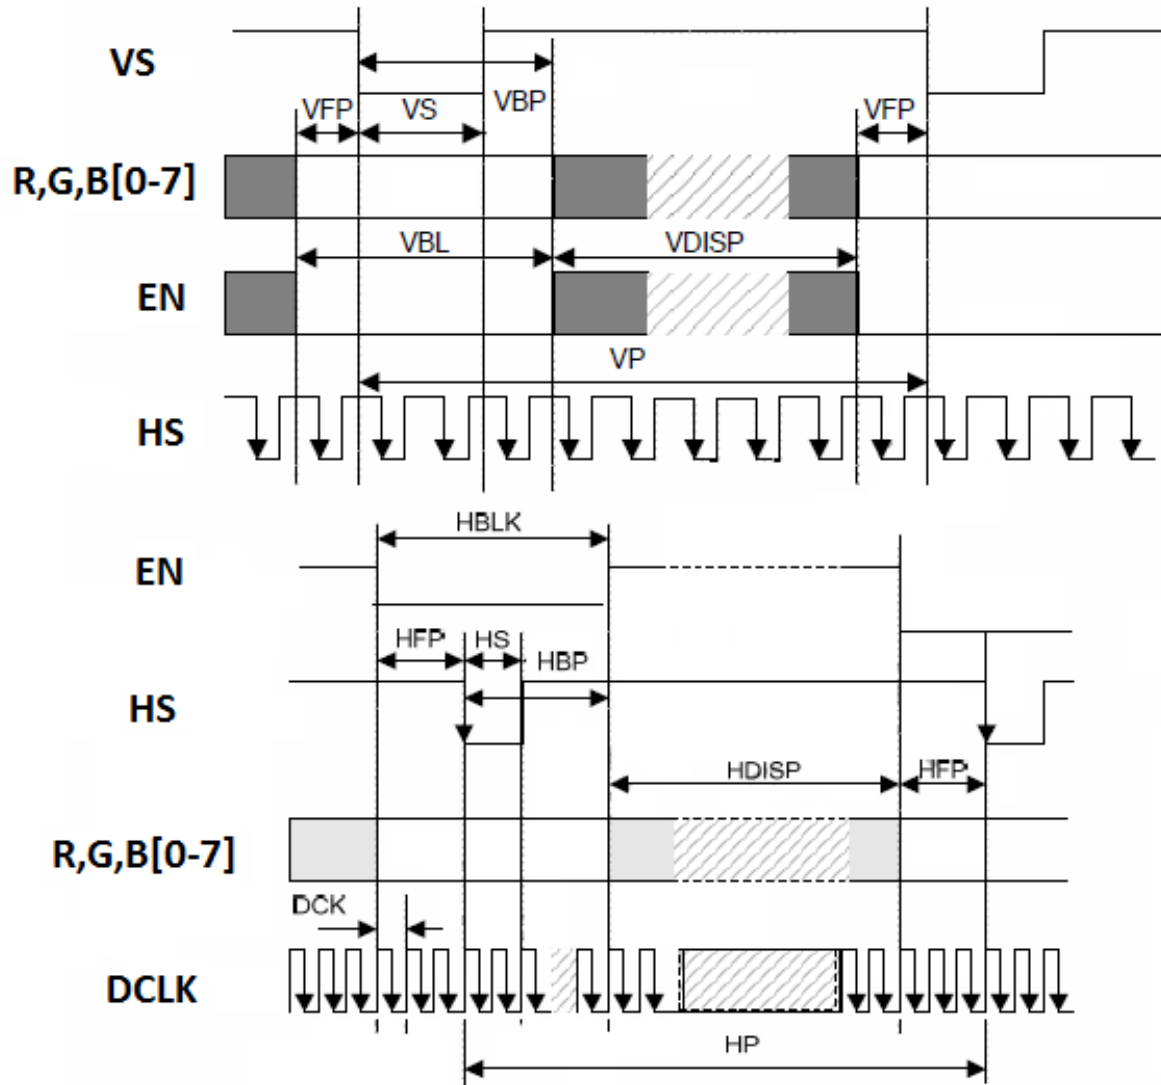


A

(COG-VLSZT029-01)

APR/2018

PAGE 17 OF 24

5.4 Power On/Off Sequence

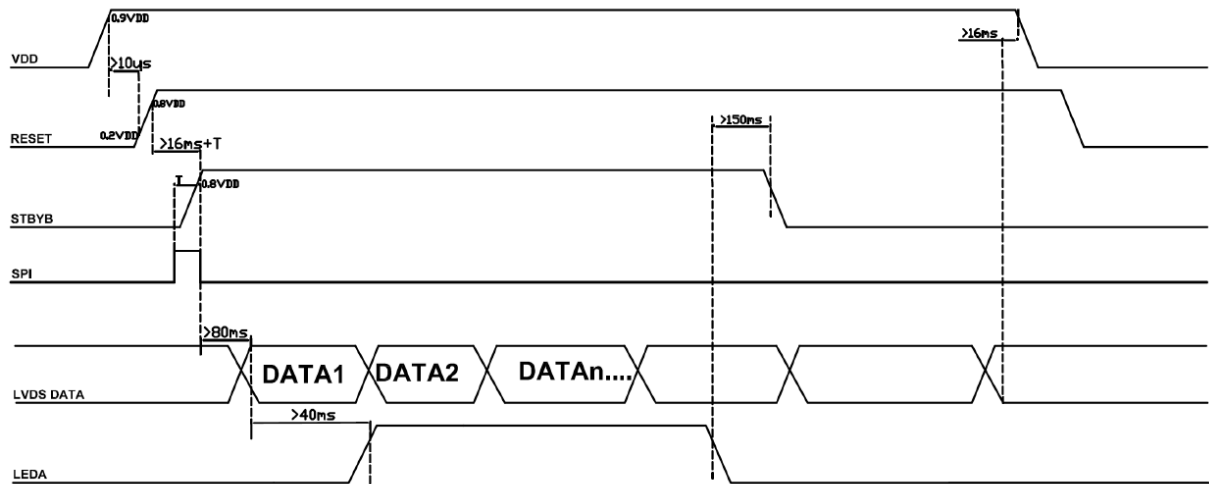

6. Optical Characteristics

Conditions unless specified otherwise:

- $T_a = 25\text{ }^{\circ}\text{C}$
- Supply voltage = 3.3 volts
- Elapsed time from switch on is greater than 30 minutes
- RGB, white and black test patterns only
- Factory settings
- Brightness = 100% unless specified
- Measurements are conducted at ambient temperature and perpendicular unless specified

Table 10

Items		Symbol	Condition		Min.	Typ.	Max.	Unit	Note
Response Time		T_R+T_F	$T_a = 25\text{ }^{\circ}\text{C}$	Viewing normal angle $\theta=\phi=0^{\circ}$	-		40	ms	(Note 1)
Viewing Angle (Centre)	12', 6'	θ_2, θ_1	$T_a=25\text{ }^{\circ}\text{C}$	$CR\geq 10$	-	80	-	deg.	(Note 2)
	9', 3'	ϕ_2, ϕ_1		$CR\geq 10$	-	80	-		

Note 1: The electro-optical response time measurements shall be made as Figure 7 by switching the “data” input signal OFF and ON. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_f .


A

(COG-VLSZT029-01)

APR/2018


PAGE 19 OF 24

Figure 7: Response Time Testing

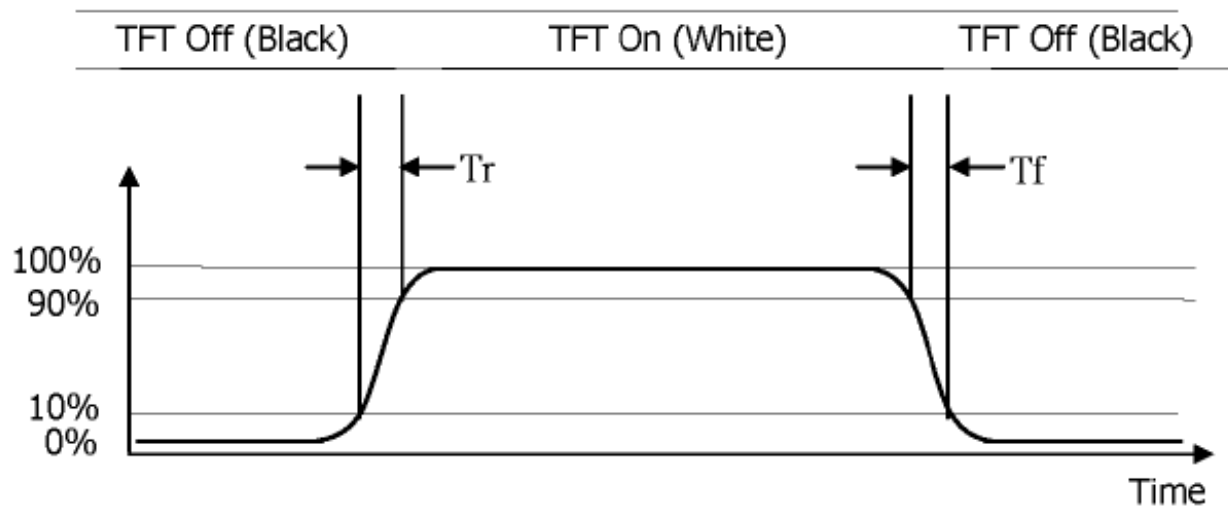

Note 2: The definitions of viewing angle.

Figure 8

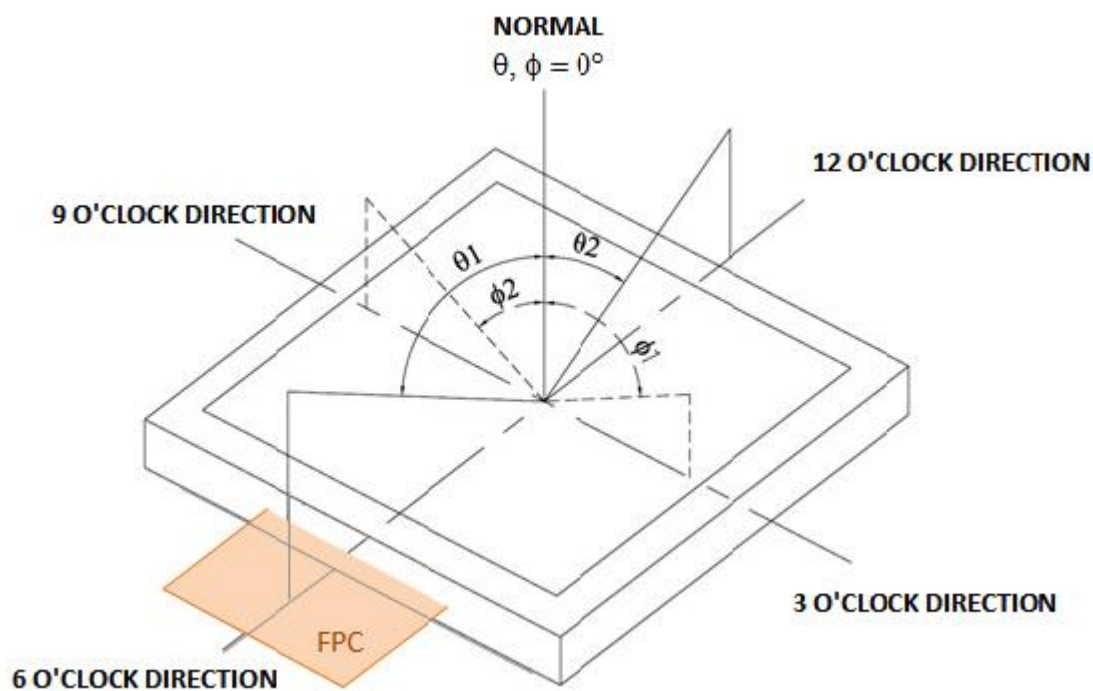Figure 9: ISO-Contrast Plot (for reference) ($T_a = 25^\circ\text{C}$)(TBD)

Reliability Tests / Environmental

6.1 Reliability Test ConditionsTable 11: List of Reliability Tests

Test		Symbol	Condition	Sample Qty.	Remark
1	High Temperature Storage	HST	+80 °C /240hrs	4pcs	
2	Low Temperature Storage	LST	-30 °C / 240 hrs	4pcs	
3	High Temperature Operating ^(Note)	HOT	+70 °C / 240 hrs	4pcs	
4	Low Temperature Operating	LOT	-20 °C / 240hrs	4pcs	
5	Accelerated Humidity Test Operating	AHTO	+60 °C / 90% RH / 240 hrs	4pcs	
6	Temperature Shock Test	TST	-20 °C <> +70 °C, 30min/5min/30min,200cycles Non-Operating	4pcs	
7	UV exposure resistance	UV	1KW Xenon / 100 hrs Power off.	2pcs	

Note 1: LCD panel surface temperature should not exceed 80 °C.

7. Quality Requirements

1. Inspection Environment

1.1. Inspection environment conditions:

- a. Room temperature: 22 ± 3 °C
- b. Humidity: $55 \pm 10\%$ RH
- c. Inspection Ambient Illumination : White fluorescent lamp light brightness -- 500~1000 Lux (150~250 Lux for function test)

1.2. Viewing Distance

The distance between the panel and the inspector's eyes shall be at least 50cm

1.3. Viewing Angle

performing in front of the panel , All directions for inspecting the sample should be within 45° to perpendicular line.

2.1.4. Inspection Area :

Display Area (Active Area)

2. Main Defect Definitions

2.1 Black / White Spots

Points on display which appear Black/ white

These defects do not vary in size or intensity (contrast) when contrast is varied.

2.2. Dark / Bright Lines

Lines on display which appear dark/bright. such as vertical, horizontal, or cross lines.

2.3. Bright Dot Defects

Dots(sub-pixels) on display which appear bright in the display area and visible at Black Pattern.

2.4. Dark Dot Defects

Dots(sub-pixels) on display which appear dark in the display area at R,G,B Color Pattern.

2.5. Mura

Mura on display which appears darker / brighter against background brightness on parts of display area

2.6. Visual Inspection

Inspection for Panel when the unit turns on.

2.7. Appearance Inspection

External inspection for Panel when the unit turns off.

3.0 Inspection Criteria

3.1. Visual Inspection Criteria

Dimensional unit: mm

Items		Details	Inspection Criteria	
			A-Area and B-Area	C- Area
Appearance Inspection	Foreign Material Glass Dent Spots Extraneous Substances	Circular Type	D≤0.2: Ignore 0.2<D≤0.4: N≤3 Distance≥ 20mm	Ignore
		Linear Type	W≤0.05: Ignore 0.05<W≤0.08, L≤3: N≤2 W>0.08: N=0 L>3: N=0 Distance≥ 20mm	
	Scratch	-		
Visual (Function) Inspection	Foreign Material	Circular Type	D≤0.2: Ignore 0.2<D≤0.4: N≤3 Distance≥ 20mm	Ignore
		Linear Type	W≤0.05: Ignore 0.05<W≤0.08, L≤3: N≤2 W>0.08: N=0 L>3: N=0 Distance≥ 20mm	
	PI Scratch/Dent	-	D≤0.2: Ignore 0.2<D≤0.4: N≤3 Distance≥20mm	Ignore
	Pixel Defects	Bright Dot	N=0	Ignore
		Dark Dot	N ≤4 (Distance≥20mm)	
		Bright + Dark Dot	N ≤4 (Distance≥20mm)	
	Polarizer Dent/ Bubble	-	D≤0.25: Ignore 0.25<D≤0.4: N≤3 Distance≥20mm	
	Display non uniformity	-	No visible(5% ND filter is used)	

A


(COG-VLSZT029-01)

APR/2018

PAGE 23 OF 24


Remark: The determination of all defects is based on the panel with Polarizer.

※ Note 1)

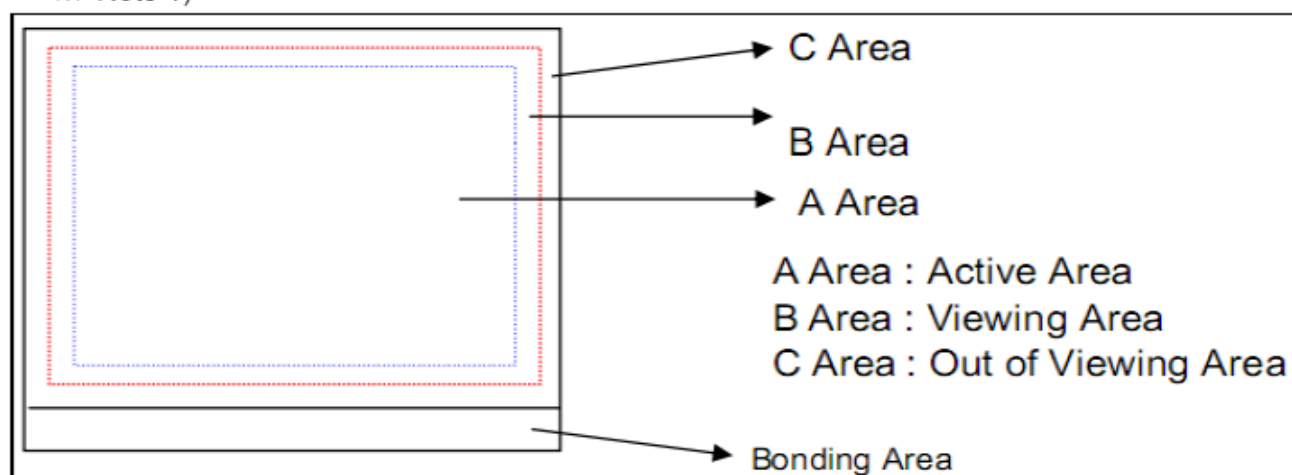


※ Note 2) D = Diameter, L = Length, W = Width, N = Number

$$D = (a + b) / 2$$

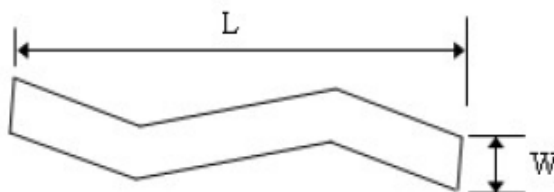


※Note 3) For pixel defect, dot means a sub-pixel. Dot defects should be larger than half size of a sub-pixel.
Dot which is invisible through 5% ND filter or smaller than 1/2 of sub-pixel size will not counted as "1 dot" defect.

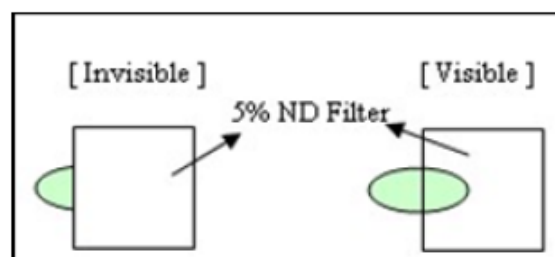

"No dot defect"
(=ignored)

"1 dot defect"
(=counted)

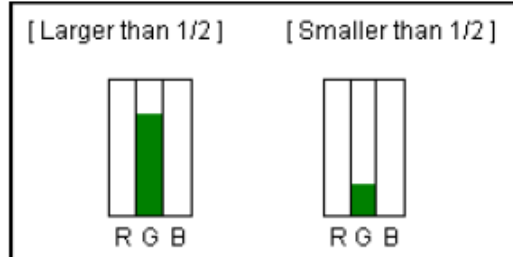

"1 dot defect"
(=counted)

"No dot defect"
(=ignored)

8. Definitions

Data sheet status	
Objective Specification	This data sheet contains target or goal specifications for product development.
Preliminary Specification	This data sheet contains preliminary data; supplementary data may be published later.
Product Specification	This data sheet contains final product specification.
Limiting values	
<p>Limiting values given are in accordance with the Absolute Maximum Rating. Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operating of the device at these or any other conditions above those given in the Characteristics sections of the specification is not implied. Expose to limiting values for extended periods may affect device reliability.</p> <p>Device is functional within the limiting conditions doesn't imply the same performance over the covered conditions, customer is required to decide the best range for the final applications.</p>	

9. Life Support Applications

These products are not designed for use in life saving appliances, devices or systems where malfunctioning of these products can reasonably be expected to result in personal injury. Customers using or selling these products for use in such applications do so at their own risk and agree full non liability of Varitronix Limited for any damages or losses resulting from such improper use or sale.

10. Appendix

“Varitronix Limited reserves the right to change this specification.”

Tel: (852) 2197-6000

Fax: (852) 2343-9555

URL: <http://www.varitronix.com>

- END -